



Xiamen Sun Diamond Tools Co.,Ltd
Xiamen Sun Tools Imp & Exp. Co.,Ltd


No.298,Tongan Park,Tongan Industrial Zone,
Xiamen, Fujian,China.Post code: 361100

Tel: 0086-592-7119705

Fax: 0086-592-7258239

Email:sales@xmsunttools.com

Web.:www.xmsunttools.com



XIAMEN SUN DIAMOND TOOLS CO.,LTD

INTRODUCTION

CONTENTS

WHY, SUN diamond tools is your best choice ?

Our advantage :

Our own factory found in 2002 which supplies professional and innovative diamond tools
We have the most knowledgeable and experienced staff in the diamond tooling industry such as our factory director has more than 20years in producing diamond tools
Quality must be first . We not only focus on our quality but also care with our cost performance.
Our goal is to provide our clients with superior quality products, excellent customer service and the most competitive price.

Our products :

Our diamond tools including sawing, drilling, profiling, milling, grinding and polishing hard materials such as granite, marble, concrete, asphalt, ceramic and other construction materials..

Our success:

We are based on consistently delivering superior products and customer service to our clientele.
We build long term business relationships with our customers by understanding and anticipating their diamond tool needs and business goals.
We pride ourselves in the ability to create customized tooling and provide product solutions to our customers.



Sun is always together with you!



◎ Cutting Tools	1-7
◎ Polishing Pads	8-9
◎ CNC Tools	10-11
◎ Cup Wheel	12
◎ Router Bit	13
◎ Core Bit	14
◎ Zero Tolerance Wheel	15
◎ Milling wheel	16
◎ Grinding Tools	17
◎ Bush Hammer	18
◎ Concrete Tools	19-22
◎ Stone Equipment	23-28

Cutting Tools

Application: Granite, Marble, Dekton, Concrete, Engineered stone, Asphalt, Ceramic and other materials.



Granite Blade

Item No.		Outer diameter		Bore	Segment size
Normal	Silent	Inch	mm		
SGB-300	SGBS-300	12	300	50/60	40x3.0x10/15/20
SGB-350	SGBS-350	14	350	50/60	40x3.2x10/15/20
SGB-400	SGBS-400	16	400	50/60	40x3.6x10/15/20
SGB-450	SGBS-450	18	450	50/60	40x3.8x10/15/20
SGB-500	SGBS-500	20	500	50/60	40x4.2x10/15/20
SGB-600	SGBS-600	24	600	50/60	40x4.8x10/15/20
SGB-700	SGBS-700	28	700	50/60	40x5.2x10/15/20
SGB-800	SGBS-800	32	800	80	40x5.8x10/15/20




Engineered Stone Blade

Item No.	Outer diameter		Bore	Segment size
	Inch	mm		
SESB-350	14	350	50/60	43.9/41.6x3.2x9
SESB-400	16	400	50/60	43.1/41.2x3.6x9
SESB-450	18	450	50/60	43.1/41.2x3.8x9



Marble Blade

Item No.		Outer diameter		Bore	Segment size
Normal	Silent	Inch	mm		
SMB-300	SMBS-300	12	300	50/60	42.8/40.3x3.0x9
SMB-350	SMBS-350	14	350	50/60	43.9/41.6x3.2x9
SMB-400	SMBS-400	16	400	50/60	43.1/41.2x3.6x9
SMB-450	SMBS-450	18	450	50/60	43.1/41.2x3.8x9
SMB-500	SMBS-500	20	500	50/60	43.1/41.2x4.2x9
SMB-600	SMBS-600	24	600	50/60	41.5/40.3x4.8x9
SMB-700	SMBS-700	28	700	50/60	41.5/40.3x5.2x9
SMB-800	SMBS-800	32	800	80	41.5/40.3x5.8x9



Porcelain Blade

Item No.	Outer diameter		Bore	Segment size
	Inch	mm		
SCB-250	10	250	50/60	41.9/39.3x2.4x8
SCB-300	12	300	50/60	44.8/42.4x2.4x8
SCB-350	14	350	50/60	42.7/40.9x2.6x8



Dekton Blade

Item No.	Outer diameter		Bore	Segment size
	Inch	mm		
SESB-350	14	350	50/60	43.9/41.6x3.2x9
SESB-400	16	400	50/60	43.1/41.2x3.6x9
SESB-450	18	450	50/60	43.1/41.2x3.8x9



Laser Cutting Blades

Item No.	Outer diameter		Bore(mm)	Segment (mm)	
	Inch	mm		Height	Thickness
SLCB-300	12	300	20/25.4	10/12/15	3.0/3.2
SLCB-350	14	350	20/25.4	7/8/10/12/15	3.2
SLCB-400	16	400	20/25.4	8/10/12	3.2/3.4
SLCB-450	18	450	25.4	7/8/12	3.2/3.6/4.0
SLCB-500	20	500	25.4	10/12	3.8
SLCB-600	24	600	25.4	10/12	4.0/4.2/4.4

Other specification are available upon request.
For cutting Asphalt , Green Concrete, Asphalt over concrete
Dry or Wet cutting

Diamond Wire Saw

Item No.	Specification	Beads/ meter	Coating	Application
SWS-01	φ7.4	37	Plastic	Granite profiling
SWS-02	φ9	33	Plastic	Marble profiling
SWS-03		33	Plastic	Marble blocking squaring
SWS-04		37	Plastic	Granite profiling
SWS-05	φ10.5	37	Plastic	Granite blocking squaring
SWS-06		33	Plastic	Marble blocking squaring
SWS-07		33/37	Spring/Rubber	Marble quarrying
SWS-08	φ11	37	Plastic	Granite blocking squaring
SWS-09		40	Rubber+Spring	Reinforced concrete
SWS-10		33/40	Spring/Rubber	Marble quarrying
SWS-11	φ11.5	37	Plastic	Granite blocking squaring
SWS-12		40	Rubber	Granite quarrying
SWS-13		40	Rubber+Spring	Reinforced concrete
SWS-14	φ11.5	33/40	Spring/Rubber	Marble quarrying
SWS-15		40	Rubber	Granite quarrying
SWS-16		40	Rubber+Spring	Reinforced concrete



Turbo Blade

Used on angle grinder
 Dry cutting for granite, marble and engineered stone.
 Arbor: 7/8"-5/8"

Item No.	Outer diameter		Segment height(mm)
	Inch	mm	
STB-50	2	50	8/10
STB-75	3	75	8/10
STB-90	3.5	90	8/10
STB-105	4	105	8/10
STB-115	4.5	115	8/10
STB-125	5	125	8/10
STB-150	6	150	8/10
STB-180	7	180	8/10
STB-200	8	200	8/10
STB-230	9	230	8/10
STB-250	10	250	8/10
STB-300	12	300	8/10
STB-350	14	350	8/10

Segmented Blade

Item No.	Outer diameter		Segment height(mm)
	Inch	mm	
SSB-75	3	75	8/10
SSB-90	3.5	90	8/10
SSB-105	4	105	8/10
SSB-115	4.5	115	8/10
SSB-125	5	125	8/10
SSB-150	6	150	8/10
SSB-180	7	180	8/10
SSB-200	8	200	8/10
SSB-230	9	230	8/10
SSB-250	10	250	8/10
SSB-300	12	300	8/10
SSB-350	14	350	8/10


Net Blade for ceramic

Item No.	Outer diameter		Segment height(mm)
	Inch	mm	
SSB-75	3	75	10
SSB-105	4	105	10
SSB-115	4.5	115	10
SSB-125	5	125	10
SSB-150	6	150	10
SSB-180	7	180	10
SSB-200	8	200	10
SSB-230	9	230	10
SSB-250	10	250	10
SSB-300	12	300	10
SSB-350	14	350	10




Diamond Wire Beads

Type: Sintered, Electroplated, Vacuum Brazed for various stones
 Diameter: 7.2mm, 8.5mm, 9.0mm, 10.0mm, 10.5mm, 11.0mm, 11.5mm
 All connector for the diamond wires are available.

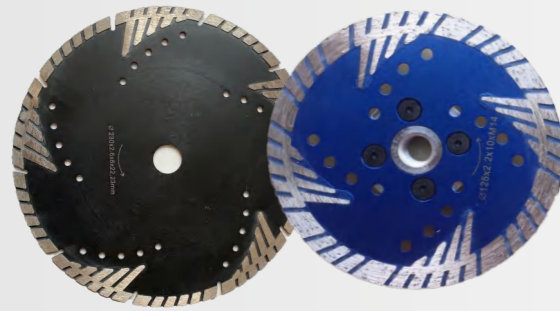

MU Blade

Item No.		Outer diameter		Segment height(mm)
		Inch	mm	
SMU-105S	SMU-105C	4	105	8/10
SMU-115S	SMU-115C	4.5	115	8/10
SMU-125S	SMU-125C	5	125	8/10
SMU-150S	SMU-150C	6	150	8/10
SMU-180S	SMU-180C	7	180	8/10
SMU-200S	SMU-200C	8	200	8/10
SMU-230S	SMU-230C	9	230	8/10

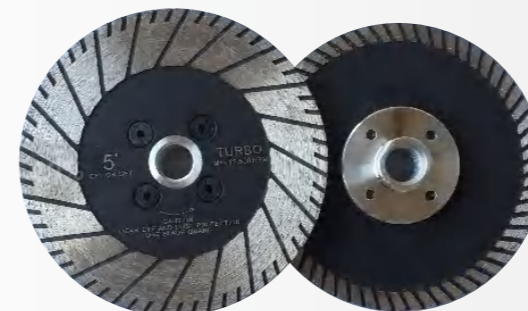

Multi Blade

Item No.	Outer diameter		Segment height(mm)
	Inch	mm	
SMB-105T	4	105	10-25
SMB-115T	4.5	115	10-25
SMB-125T	5	125	10-25
SMB-150T	6	150	10-25
SMB-180T	7	180	10-25
SMB-200T	8	200	10-25
SMB-230T	9	230	10-25




GU Blade

Item No.		Outer diameter		Segment height(mm)
		Inch	mm	
SGU-105S	SGU-105C	4	105	8
SGU-115S	SGU-115C	4.5	115	8
SGU-125S	SGU-125C	5	125	8
SGU-150S	SGU-150C	6	150	8
SGU-180S	SGU-180C	7	180	8
SGU-200S	SGU-200C	8	200	8
SGU-230S	SGU-230C	9	230	8




Multi Blade

Item No.	Outer diameter		Segment height(mm)
	Inch	mm	
SMB-105W	4	105	10-25
SMB-115W	4.5	115	10-25
SMB-125W	5	125	10-25
SMB-150W	6	150	10-25
SMB-180W	7	180	10-25
SMB-200W	8	200	10-25
SMB-230W	9	230	10-25

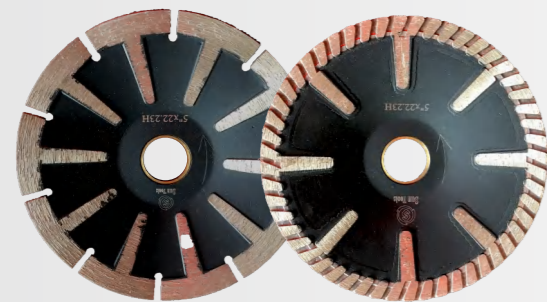


Contour Cutting Blade

Item No.		Outer diameter		Segment height(mm)
		Inch	mm	
SCC-105S	SCC-105T	4	105	9
SCC-115S	SCC-115T	4.5	115	9
SCC-125S	SCC-125T	5	125	9
SCC-150S	SCC-150T	6	150	9
SCC-180S	SCC-180T	7	180	9

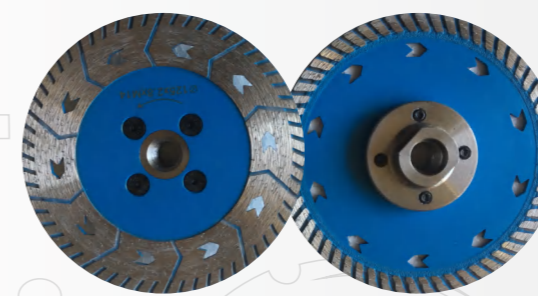

Multi Blade

Item No.	Outer diameter		Segment height(mm)
	Inch	mm	
SMB-105A	4	105	10-25
SMB-115A	4.5	115	10-25
SMB-125A	5	125	10-25
SMB-150A	6	150	10-25
SMB-180A	7	180	10-25
SMB-200A	8	200	10-25
SMB-230A	9	230	10-25

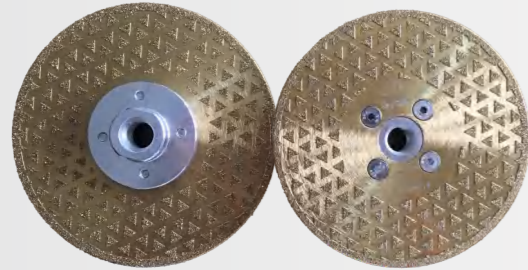


Electroplated Triangle Blade

Item No.	Outer diameter		Thread
	Inch	mm	
SET-105	4	105	M14,5/8"-11,22.23MM
SET-115	4.5	115	
SET-125	5	125	
SET-150	6	150	
SET-180	7	180	
SET-200	8	200	
SET-230	9	230	



Electroplated ring blade

Item No.	Outer diameter		Thread
	Inch	mm	
SER-105	4	105	M14,5/8"-11,22.23MM
SER-115	4.5	115	
SER-125	5	125	
SER-150	6	150	
SER-180	7	180	
SER-200	8	200	
SER-230	9	230	

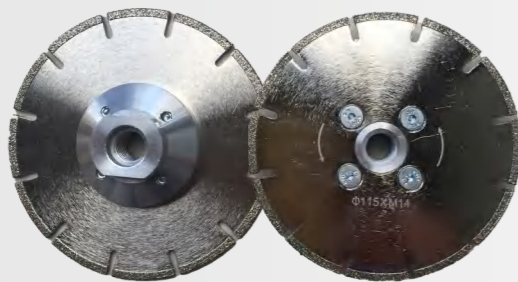

Electroplated blade

Item No.	Outer diameter		Thread
	Inch	mm	
SEB-105	4	105	M14,5/8"-11,22.23MM
SEB-115	4.5	115	
SEB-125	5	125	
SEB-150	6	150	
SEB-180	7	180	
SEB-200	8	200	
SEB-230	9	230	



Electroplated blade with Protection teeth


Item No.	Outer diameter		Thread
	Inch	mm	
SEB-105P	4	105	M14,5/8"-11,22.23MM
SEB-115P	4.5	115	
SEB-125P	5	125	
SEB-150P	6	150	
SEB-180P	7	180	
SEB-200P	8	200	
SEB-230P	9	230	

Polishing Pad

Diameter: 3",4",5",6",7", 8",10",12"
 Grit: 30#, 50#,100#, 200#, 400#, 800#, 1500, 3000#, white buff, black buff.
 Different types and steps are available as request.
 Wet & Dry for natural stones and Engineered stones.

Dry polishing pad

Excellent for engineered stone/quartz surface.
 Super flexible & aggressive
 Won't bleed or burn the materials



Engineered stone dry pad
 DP-1 (3",4",5")



Dry polishing pad
 DP-2 (3",4",5")



Super thin dry pad
 DP-3 (3",4",5")

Wet polishing pads


Extremely Flexible, fast polishing
 Special design for engineered and other stones



Wet polishing pads
 WP-1 (3",4",5")



Wet polishing pads
 WP-2 (3",4",5")

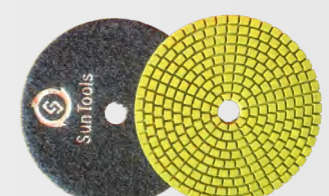


Wet polishing pads
 WP-3 (3",4",5")

3 Step polishing pads



3SDP (3",4",5")

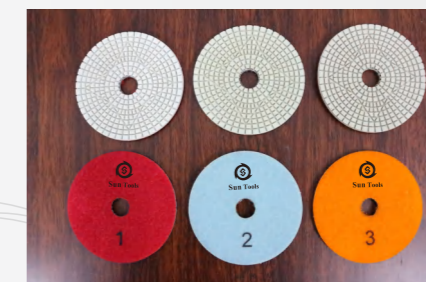

3SWP-1 (3",4",5")



3SWP-2 (3",4",5")


Dimond hand polishing pads

Size:90x55mm
Grit:60# 100# 200# 400# 800# 1500# 3000#



Sponge polishing pads


Size:4",5"
Grit:50# 100# 200# 400# 1000# 2000# 3000# 6000# 10000#

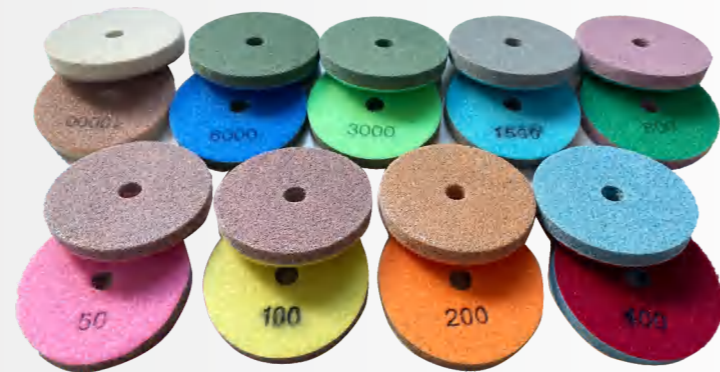

Backer Pads



Rigid



Flexible



Super flexible



Aluminium



Snail lock




Snail lock



Plastic



silicone carbide disc

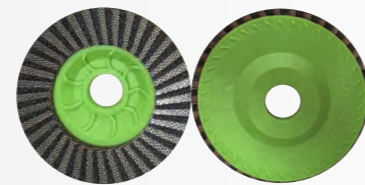

Flap Disc

CNC Tools

CNC Profile Wheel

Diameter: 80-120 mm
Connection: 35 or 22 mm hole available



Sink profile wheel

Diameter: 20mm
Connection:1/2"G
Different shapes and full set available.



Other customized CNC tools



Engraving tools



CNC grooving tools



CNC tools



CNC widia tools



Bottom Segments



CNC router



CNC router



Head mill

CNC Finger bit


Application for Granite, Marble, Dekton, and Engineered stone etc.
Working length from 30mm to 100mm.



Item No.				Diameter		Segment Height(mm)	Thread
Segmented	Double segments	With bottom Segments	Vacuum brazed	Inch	mm		
SFB-2230S	SFB-2230D	SFB-2230B	SFB-2230V	7/8	22	30	1/2" Gas
SFB-2240S	SFB-2240D	SFB-2240B	SFB-2240V	7/8	22	40	
SFB-2250S	SFB-2250D	SFB-2250B	SFB-2250V	7/8	22	50	
SFB-2260S	SFB-2260D	SFB-2260B	SFB-2260V	7/8	22	60	
SFB-2530S	SFB-2530D	SFB-2530B	SFB-2530V	1	25	30	
SFB-2540S	SFB-2540D	SFB-2540B	SFB-2540V	1	25	40	
SFB-2550S	SFB-2550D	SFB-2550B	SFB-2550V	1	25	50	
SFB-2560S	SFB-2560D	SFB-2560B	SFB-2560V	1	25	60	

Finger Bit Tip

Split segment design for faster cutting, improved water distribution and excellent slurry removal.

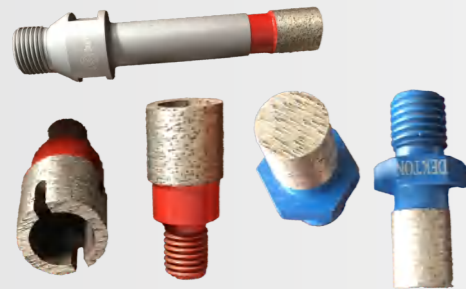

Item No.			Diameter (mm)	Segment Height(mm)	Fastening
Continuous	With hole	With slot			
SFBT-C	SFBT-H	SFBT-S	12/16/18/20	15/20	M12/M10
Connector			1/2"G×68L/100L×M12		

Stubbing Wheel



Item No.		Diameter		Segment Height(mm)	Fastening
Segmented	Continuous	Inch	mm		
SSW-5020S	SSW-5020C	2	50	20	10+2 holes
SSW-5030S	SSW-5030C	2	50	30	10+2 holes
SSW-8620S	SSW-8620C	3 3/8	86	20	50+3 holes
SSW-8630S	SSW-8630C	3 3/8	86	30	50+3 holes
SSW-8640S	SSW-8640C	3 3/8	86	40	50+3 holes
SSW-10020S	SSW-10020C	4	100	20	50+3 holes
SSW-10030S	SSW-10030C	4	100	30	50+3 holes
SSW-10040S	SSW-10040C	4	100	40	50+3 holes
Connector		SSW-C		D37×90L×1/2"G / D75×78L×1/2"G	

Cup wheel

Mainly used for chamfering, beveling and grinding stone edges & surfaces.
Available in different grits for any application
Fast, aggressive, smooth grinding.
Well balanced to eliminate vibration
Resin filled desinged for smooth, chip-free grinding



Trubo cup wheel

Item No.				Outer diameter		Thread	Grit
Normal	Aluminium	Resin filled	Snail lock	Inch	mm		
STCW-100N	STCW-100A	STCW-100R	STCW-100S	4	100	M14 5/8"-11	30 # 60 #
STCW-125N	STCW-125A	STCW-125R	STCW-125S	5	125	Snail lock	120 #

Resin filled Cup wheel

Different types are available as request.
Diameter: 4", 5"
Thread: M14, 5/8"-11
Grit: 30# 60# 120#



Continuous Cup Wheel

Item No.		Outer diameter		Thread	Grit
Segmented	Continuous	Inch	mm		
SCCW-100	SCCW-100G	4	100	M14 5/8"-11	30 # 60 # 120 #
SCCW-125	SCCW-125G	5	125	Snail lock	120 #
SCCW-100S	SCCW-100T	4	100	M14 5/8"-11	30 # 60 #
SCCW-125S	SCCW-125T	5	125	Snail lock	120 #



Router bit

Mainly used for edge profiling in granite, marble and other nature stone.
 Alllicable machine:SECTOR,MASTER,FLEX,Standard edge profiling machine
 Fast, clean cut and long life
 Every router bit has balance test for safe and smooth using.
 Various shapes,sizes,and grits are available upon request



Portable machine



Router bits with adapter



Full set router bits



Segmented router bit



Continuous router bit



Vacuum brazed & Resin filled



Core Bit



Wet Core Bit

Fast and clean cut and good performance
 Diameter from D6 to D350 upon request
 Thin Wall Crown design for free-chip

Item No.		Outer diameter		Length(mm)	Thread
Normal	Crown	Inch	mm		
SCB-25N	SCB-25C	1	50	80~120	M14、M16、 5/8"-11、 1/2"Gas, Shaft
SCB-30N	SCB-30C	1 3/16	50		
SCB-32N	SCB-32C	1 1/4	86		
SCB-35N	SCB-35C	1 3/8	86		
SCB-38N	SCB-38C	1 1/2	86		
SCB-40N	SCB-40C	1 5/8	100		
SCB-45N	SCB-45C	1 3/4	100		
SCB-50N	SCB-50C	2	100		

Dry Core Bit

Ultra fast
 Vacuum brazed side protection
 Wet and Dry cutting



Item No.		Outer diameter		Length(mm)	Thread
		Inch	mm		
SCB-25D	SCB-25DT	1	25	104	M14、M16、 5/8"-11、 1/2"Gas
SCB-30D	SCB-30DT	1 3/16	30	104	
SCB-32D	SCB-32DT	1 1/4	32	104	
SCB-35D	SCB-35DT	1 3/8	35	104	
SCB-38D	SCB-38DT	1 1/2	38	104	
SCB-40D	SCB-40DT	1 5/8	40	104	
SCB-45D	SCB-45DT	1 3/4	45	104	
SCB-50D	SCB-50DT	2	50	104	

Blind Core Bit

Good performance for granite and marble
 With center waterfeed



Item No.	Outer diameter	Length(mm)	Thread
SCB-6B	6	100	M14、M16、 5/8"-11、 1/2"Gas
SCB-8B	8		
SCB-10B	10		
SCB-12B	12		
SCB-14B	14		



Dekton core bit



Sink core bit



Glass core bit



VB Core bit

Zero Tolerance Wheel

Good balance, zero Vibration
Resin filled speical designed to reduce vibration and chip free
Different types upon request

Item No.				Diameter		Segment size(mm)	Grit	Fastening
Segmented	Resin filled	With botton Segments	Continuous	Inch	mm			
SZTW-2535S	SZTW-2535R	SZTW-2535B	SZTW-2535C	1	25	35	40 # 60 # 100 # 200 #	M14 M16 5/8"-11 1/2"Gas
SZTW-2545S	SZTW-2545R	SZTW-2545B	SZTW-2545C	1	25	45		
SZTW-5045S	SZTW-5045R	SZTW-5045B	SZTW-5045C	2	50	35		
SZTW-5045S	SZTW-5045R	SZTW-5045B	SZTW-5045C	2	50	45		
SZTW-2545S	SZTW-2545R	SZTW-2545B	SZTW-2545C	3	75	35		
SZTW-5045S	SZTW-5045R	SZTW-5045B	SZTW-5045C	3	75	45		
SZTW-7545S	SZTW-7545R	SZTW-7545B	SZTW-7545C	4	100	35		
SZTW-10045S	SZTW-10045R	SZTW-10045B	SZTW-10045C	4	100	45		




Item No.		Diameter		Segment size(mm)	Grit	Fastening
Vacuum brazed	Resin	Inch	mm			
SDW-5050V	SDW-5050R	2	50	50	50 # 100 # 200 #	M14
SDW-7550V	SDW-7550R	3	75	50	400 # 800 # 1500 #	M16
SDW-10050V	SDW-1050R	4	100	50	3000 # BUFF	5/8"-11 1/2"Gas

Milling Wheel / Profiling wheel

Used for calibrating profiling surface of stone and concrete in Bridge cutting machine and Edge cutting machine.
Special welding design for different shapes to make very precise edge.
All kinds of different size and shapes can be produced as request.

Milling wheel

Diameter from D250 to D500, silent design reduces the voice and weight.

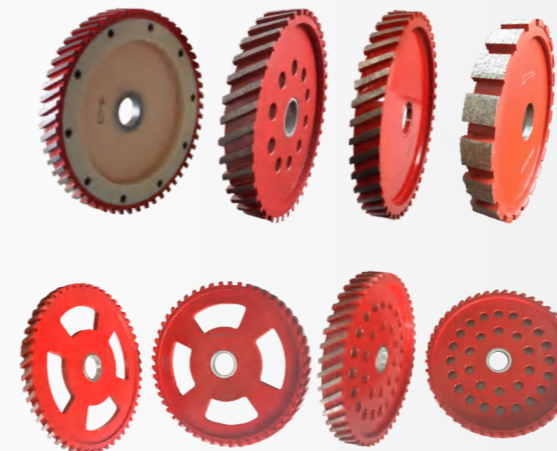

Item No.			Outer diameter		Segment length(mm)
Normal	Silent	with holes	Inch	mm	
SCW-1210N	SCW-1210S	SCW-1210H	12	300	10
SCW-1220N	SCW-1220S	SCW-1220H	12	300	20
SCW-1225N	SCW-1225S	SCW-1225H	12	300	25
SCW-1230N	SCW-1230S	SCW-1230H	12	300	30
SCW-1235N	SCW-1235S	SCW-1235H	12	300	35
SCW-1240N	SCW-1240S	SCW-1240H	12	300	40
SCW-1410N	SCW-1410S	SCW-1410H	14	350	10
SCW-1420N	SCW-1420S	SCW-1420H	14	350	20
SCW-1425N	SCW-1425S	SCW-1425H	14	350	25
SCW-1430N	SCW-1430S	SCW-1430H	14	350	30
SCW-1435N	SCW-1435S	SCW-1435H	14	350	35
SCW-1440N	SCW-1440S	SCW-1440H	14	350	40


Profiling Wheel



Grooving Segmented Electroplated Full set



Grinding tools

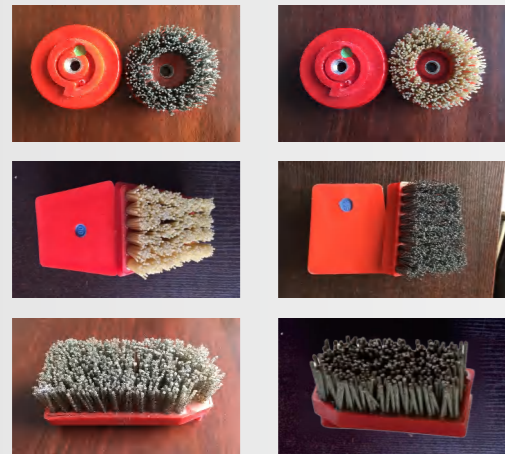

Brush

Diamond brush for leather finish on granite, marble and artificial stone surface.
Antiquing brush for roughness and antique finish on stone.

Item No.		Type	Grit	Thread
Antiquing	Diamond			
SABI	SDBI	Fickert	Steel, 24#, 36#, 46#, 60#, 80#, 120#, 180#, 220#, 240#, 320#, 400#, 500#, 800#, 1000#, 1200#, 1500#, 2000#, 3000#.	M14, M16, 5/8"-11, Snail lock
SABR	SDBR	Frankfurt		
SAB-100	SDB-100	Round D100		
SAB-125	SDB-125	Round D125		



Edge Grinding Wheels

Excellent for Automatic Edge Machine

Item No.		Outer diameter		Grit	Fastening
Metal	Resin	Inch	mm		
SGW-100M	SGW-100R	4	100	#50, 100, 200, 400, 800, 1500, 3000, black buff, white buff	Snail Lock
SGW-125M	SGW-125R	5	125		



Grinding Block

For coarse, fine processing, and polishing for stone with strong grinding, long lifespan, good polishing effect and low cost.

Item No.		Type	Grit
Frankfurt	Fickert		
SRDM	SIDM	Diamond metal bond	36#, 46#, 60#, 80#, 120#, 180#, 240#
SRDR	SIDR	Diamond resin bond	320#, 400#, 600#, 800#, 1200#, 1500#, 3000#
SRM	SIM	Magnesia	24#, 36#, 46#, 60#, 80#, 120#, 180#, 240#, 320#
SRB	SIB	Oxalic acid buff	

Bush Hammer

Used to process bush hammered finish in granite, marble and other stone surfaces.
High performance, much faster than manual processing.
The grit of bush hammered surface can be adjusted.

Applicable machine

Manual grinding machine
Auto/Semi-auto bush hammered machine



Bush Hammer Plate

Item No.	Outer diameter		Connector
	Inch	mm	
SBH-110	4.5	110	M16 5/8"-11 42MM 47MM 50MM
SBH-125	5	125	
SBH-150	6	150	
SBH-200	8	200	
SBH-250	10	250	
SBH-300	12	300	



Bush Hammer Roller


Item No.	Outer diameter	Segment quantity
	mm	
SBHR-3230	32	30
SBHR-4545	45	45
SBHR-6540	65	60



Grooving roller



Bush hammer finish Fine

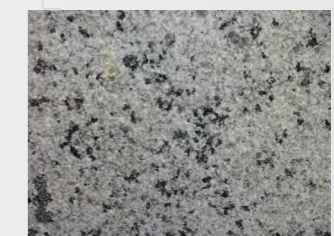

Bush hammer finish Rough

Concrete Tools

Concrete grinding disc

Soft bonding: ideal for medium to hard concrete

Medium bonding: ideal for medium-soft to medium concrete

Hard bonding: ideal for soft concrete

PCD: ideal for epoxy, paint, glue, mastics, and coatings. Not to be used directly on concrete and any metal material. For the removal of epoxy glue or polyurethane glue coating products choice, if the coating thickness is less than 2mm, use 16# or 6# diamond tools, 6# diamond tools more efficient construction, if the coating is greater than 2mm, please use PCD

Grinding plate 10"/D250

Grit#:6#,16#,30#,50#,100#,200#,300#,400#

PCD Design



SCGP-1



SCGP-2



SCGP-3




SCGP-4



SCGP-5



SCGP-6



SCGP-7



SCGP-8


Grinding disc 4"/D100 to 7"/D180



SCGD-1




SCGD-2



SCGD-3

Floor Pad (Metal type and Resin Type)



MF-1




MF-2



RF-1




RF-2



RF-3



RF-4



RF-5




RF-6



RF-7



RF-8



RF-9


Floor Polishing Pad Metal Bond

For concrete,granite,marble and other material removing and coarse grinding.
 Hardness: Extra Hard, Hard, Medium, Soft,Extra Soft
 Grit: #6,#16,#30,#60,#120




Diamond Grinding Plug

Provide fast removing and resurfacing for concrete surfaces, coatings, glues and epoxies
 16/20# for material removal, 30/40# for rough grinding,60/80# for medium grinding, 120/150# for fine grinding.
 Equipment:to all plug stone holder and Speed shift plate Terrzzo grinding machine

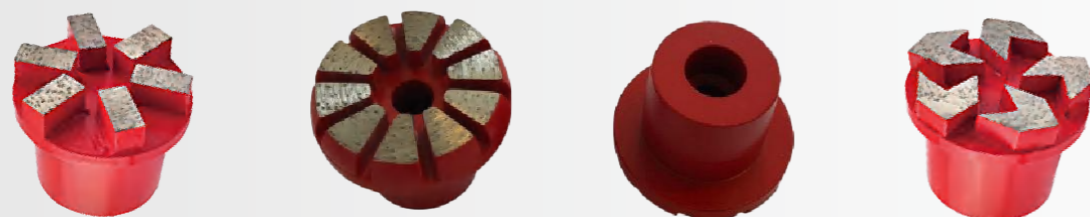

Reinforced concrete core bit

Diameter: 25mm, 32mm, 45mm, 50mm, 62mm, 76mm, 82mm,102mm, 112mm, 127mm, 200mm,250mm, 300mm,350mm
 Segment height:10mm
 Working length:350/400/450/500mm
 Connection:1-1/4

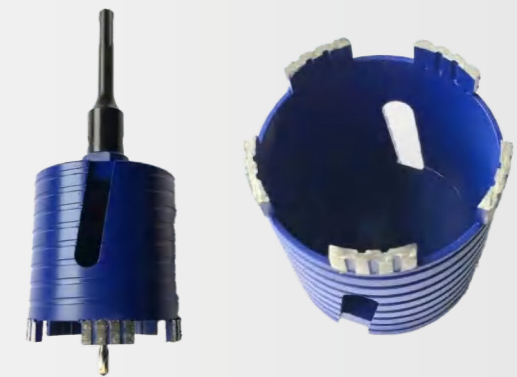

Fiber Glass Rods



Stone Equipment

Air Polisher Rear Exhaust



Item #: SAP-R	
Air Consumption	16cfm(0.45m3/min)
Air Pressure	90Psi (621kpa)
Speed	0~5500RPM
Thread	5/8"-11,M14,M16
Max. Pad Diameter	5"
Weight	2.2KG

Air Polisher Side Exhaust



Item #: SAP-S	
Air Consumption	16cfm(0.45m3/min)
Air Pressure	90Psi (621kpa)
Speed	0~4500RPM
Thread	5/8"-11,M14,M16
Max. Pad Diameter	5"
Weight	1.8KG

Wet Air Grinder



Item #: SWAGD125/SWAGD150/SWAGD180	
Air Pressure:	90psi(621Kpa)
Air Consumption:	15cfm(0.42m3/min)
Air Compressor Required:	5HP min
Air Inlet:	1/4"Npt
power Output :	650W
"No-Load Speed:	10000RPM"
"Disc Diameter:	5" (125mm)"
Weight:	3.5kg

Electric Wet Polisher




Item #: SWEPD125	
Voltage:	110V 60HZ / 220V 50HZ
Power:	800W
Free speed:	1000 ~ 4000 RPM
Max Pad:	5" D125

Portable edge machine



Item #: SPEM	
Rated Voltage	230/110V
Rated Frequency	50/60Hz
Rated Input	2000W
No-load Speed	0~8500RPM
Max. Stone Thickness	40mm
Diamond Grinding Wheel	90mm
Weight	15KG

Mitre Clamp



Item #: SMC-130/SMC-310	
Grip range:	0-130mm 0-310mm

Slab Carry Clamp



Item #: SSCC	
Grip Range:	0 – 45mm
Size:	45x27x13mm
Net Weight:	4.5kg
Lifting Capacity:	200kg
Carton Dimensions:	48*30*25cm /2 pairs

Stone slab lifter




Regular type #: SSSL	1000kg
Automatic type #: SSSLA	1300kg
Grip range:	0~30mm 10~50mm / 15~50mm 20~60mm 28~70mm

Scissor Clamp Lifter



Item #:	Grip range :	Capacity :
SSCL90	20-90mm	350kg
SSCL120	30-120mm	550kg
SSCL140	30-140mm	650kg
SSCL150	10-150mm	680kg
SSCL160	50-160mm	1000kg
SSCL350	100-350mm	1500kg

Stone Seam Setter

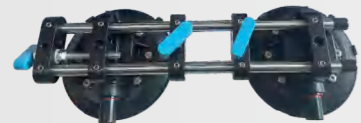

Item #:	Size:
SSSD150/SSSD180/SSSD200	6"/150mm Cups
	7"/180mm Cups
	8"/200mm Cups

90degree Seam Setter



Item #:	Size:
SSS90-D150	6" / 150mm Cups

Portable seam setter




Item #:	Size:
SPSSD130/SPSSD150	5"/130mm Cups
	6"/150mm Cups

Multi-degree Portable seam setter



Item #:	Size:
SPSS90-D130	Range 90~270 degree
	For smooth surface

Seam Setter

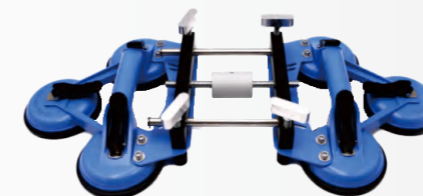

Item #:	Size:
SSS-6cups	5"/123mm x 6cups

Electric Vacuum Suction Cup Lifter



Item#:	Cup size:
SAASSSingle cup/SAASDDouble cups/SAASTTriple cups	D118, D123, D130
	Black color / Silver color
	Yellow color / Blue color / Red color
	Other colors can be available
Packing:	40pcs Single cup / CTN
	24pcs Double cups /CTN
	12pcs Triple cups / CTN

8" Vacuum Suction Lifter



Item#:SVSL200ABS
 ABS handle
 Capacity : 60kg
 Double rubber layers
 Plastic packing box

8" Vacuum Suction Lifter



Item#:SVSL200
 Metal handle
 Capacity : 200kg
 Double rubber layers
 Plastic packing box

8" Vacuum Suction Lifter with Gauge



Item#:SVSL200G
 Metal handle
 Capacity : 200kg
 Double rubber layers
 Plastic packing box

Electric Vacuum Suction Cup Lifter



Item#:SBEVSC
 Application:Designed to lift smooth or rough Granite, marble and ceramic slabs
 Battery Voltage: 14.8V
 Battery cell Specification: 2.6Ah
 Rated Power: 16W
 Dimensions: 300*180*110mm
 Net weight (with battery) : 1.5kg(3.3lbs)
 Working temperature: 0°C - 60°C (30°F - 140°F)
 "Working time (full charge): 24 hours"
 Battery charge: DC16.8v 1.5A
 Input voltage batter charge: 100V-240V,50/60HZ,1.5A max

Slab Transport cart



Item#:SSTC-S
 Size: 1200x800x1050mm Load capacity: 1.5T
 1800x800x1050mm 1.5T



Item#:SSTC-D
 Size: 1500x1100x1500mm Load capacity: 1.8T
 1800x1100x1500mm 1.8T

Counter Top Work Table



Item#:SSTC-S
 Size: 2000x600x900mm Load capacity: 1.5T
 3000x600x900mm 1.5T

TILE and Slab Carrying Tools



Item #:STSC180
 Material:Reinforced Aluminium++Premium rubber
 Lifting Capacity Max: 180kg
 Working length: 190-320cm
 Size of cup: 8"/D200
 Quantity of cup: 8pcs

TILE and Slab Carrying Tools



Item #:STSC280
 Material:Reinforced Aluminium++Premium rubber
 Lifting Capacity Max: 280kg
 Working length: 190-340cm
 Size of cup: 8"/D200
 Quantity of cup: 10pcs